



NETTIX 1601

PLAYGROUND FOUIPMENT

DEVICE SPECIFICATIONS		
Safety zone	26,37 m ²	
Length	3,37 m	
Width	0,44 m	
Total height	2,20 m	
Free fall height	2,00 m	
Age range	4-14 years	
In accordance w/ EN standards	1176-1:2008	
Availability of spare parts	Yes	



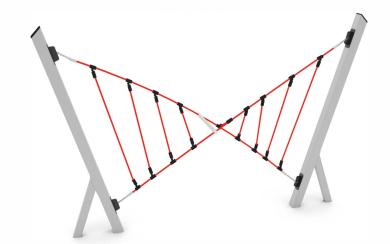

MATERIAL SPECIFICATION

Nettix series –functional sets of devices for athletic purposes. The series is composed of elements designed for climbing, hanging down, crossing, crawling, jumping and exercising the sense of balance.

- Steel elements galvanised and powder coated protected against corrosion
- Platforms made from anti-slip high pressured laminated HEXA panels effective protection against environmental factors and wear resistant
- Connectors, screws, washers and nuts made of stainless steel and/or galvanised protected with plastic caps
- Spinning elements
- Polypropylene (PP) or Nylon combination ropes with steel core
- Attested stainless steel chains

ADDITIONAL COMMENTS

- The device is certified by an accrediting organization
- The device is designed for public playgrounds

Due to the free fall height of the device, the EN 1176-1:2008 standard allows the following surfaces to cushion a fall. The level of granular materials requires filling in, conservation of synthetic materials is required in accordance with the manufacturer's instructions. Dimensions of the

iodridation are described in installation instruction,				
Material	Description [mm]	Minimal layer thickness [mm]	Dimensions foundation	
Tree bark	Grain size from 20 to 80	300	A,C	
Chip	Grain size from 5 to 30	300	A,C	
Sand	Grain size from 0,2 to 2	300	A,C	
Gravel	Grain size from 2 to 8	300	A,C	
Synthetic materials	Free fall approval ≥2000		A,B,C	