




| Device Specifications              |                      |
|------------------------------------|----------------------|
| Safety zone                        | 29,80 m <sup>2</sup> |
| Length                             | 3,25 m               |
| Width                              | 3,11 m               |
| Total height                       | 2,83 m               |
| Free fall height                   | 0,90 m               |
| Age range                          | 1-8 years            |
| In accordance w PN-EN standards    | 1176-1:2017          |
| Availability of spare parts        | Yes                  |
| Dimension of the biggest part [cm] | 8x8x306              |
| Weight of the heaviest part [kg]   | 30 kg                |

Minimal space

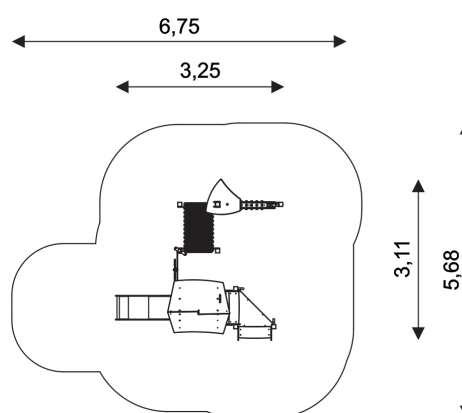

#### MATERIAL SPECIFICATION

- Stainless steel or Galvanized and/or powder coated steel 80x80 mm construction;
- Roofs and panels are made of atmospheric condition resistant HDPE plates;
- Durable, anti-slip and waterproof platforms and climbing walls made of HPL;
- Screws covered with plastic caps or made of stainless steel;
- Top of the construction is secured with rubber caps;
- Stainless steel bars and handrails;
- Platforms made of metal, hot-drip galvanized and powder coated;
- Portholes and windows made of polycarbonate;
- Double-walled pipe tunnel made of PP polypropylene;
- Slides made of stainless steel;
- Xylophone made of aluminum pipes;

#### ADDITIONAL COMMENTS

- Depth of foundations on a flat surface 80/70/60 cm;
- No sharp edges or chinks that would pose a danger of jimmie the head, fingers or any other body parts;
- The equipment is designed for public playgrounds;
- The equipment render is of an illustrative nature and shows only the general specification of the equipment, but not actual appearance;
- Slides should not be installed southwards;
- The equipment is suitable for people with disabilities;

#### SURFACES

Due to the free fall height of the equipment, the PN-EN 1176-1:2017 standard allows the following surfaces: turf/ soil (A,B,C), sand with minimal layer thickness of 30 cm (A,C), synthetic material approved for free fall of 0,90 m (A,B,C)