


## ROBINIA RB1244

## PLAYGROUND EQUIPMENT



| Device Specifications              |                     |
|------------------------------------|---------------------|
| Safety zone                        | 17,4 m <sup>2</sup> |
| Length                             | 160 cm              |
| Width                              | 120 cm              |
| Total height                       | 160 cm              |
| Free fall height                   | < 60 cm             |
| Age area                           | 1-8 years           |
| In accordance with EN standard     | 1176-1:2017         |
| Weight of the heaviest part [kg]   | 51 kg               |
| Dimension of the biggest part [cm] | 220x18x18           |
| Availability of spare parts        | Yes                 |

Minimal space

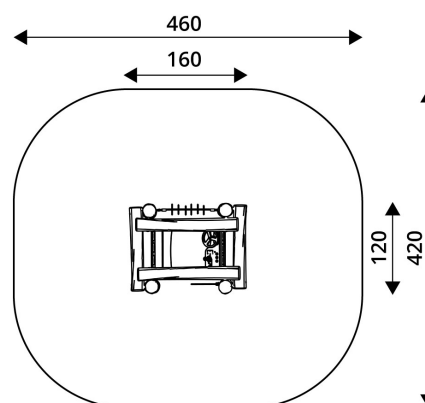

### MATERIAL SPECIFICATION

- Construction made of Robinia - very durable acacia wood with a diameter of ~ 18 cm without sharp edges, resistant to weather conditions,
- Side panels and seats made of Robinia - very durable acacia wood, resistant to weather conditions,
- Moving elements made of durable, waterproof HPL plates,
- Dashboard and steering wheel made of HDPE plate, resistant to weather conditions,
- Rubber door with textile reinforcement,
- Steel ropes in PP braid, connected with durable aluminum, stainless steel and/or plastic elements,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel and/or galvanized steel screws,
- Screws covered with plastic caps or stainless steel screws.

### ADDITIONAL COMMENTS

- equipment adapted for the disabled; intended for public playgrounds,
- equipment has a certificate issued by an accredited entity or a declaration of conformity,
- no sharp edges or chinks that would pose a danger of jimming the head, fingers or any other body parts,
- anchoring on flat surface, 80/70/60 cm deep,
- render is for reference only, the actual appearance of the equipment and its color may vary.

### SURFACES

Due to the free fall height of the equipment, the EN 1176-1:2017 standard allows the following surfaces: turf/ soil (A,B,C), sand with minimal layer thickness of 30 cm (A,C), synthetic material approved for free fall of 0,60 m.