

**Product technical sheet**

**SWING ST0529**



5 - 12 years



2 kids



19,2 m<sup>2</sup>



**Material specification**

- Hot-dip galvanized and powder coated steel construction,
- Seats made of safe, certified rubber with textile reinforcement,
- Stainless steel handrails,
- Moving elements based on a durable braking system closed in casings, which do not require greasing and maintenance, ensuring long service life of the device,
- Screws covered with plastic caps and/or stainless steel screws,



**Facilitating disability**



seats



integration






**Physical development**



community



rocking

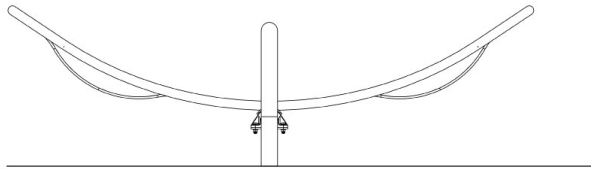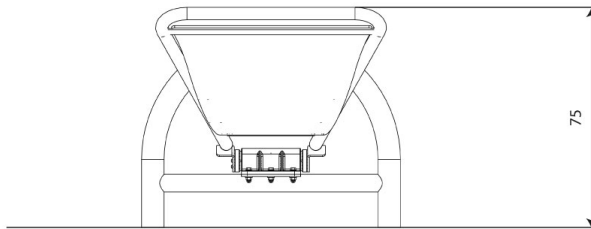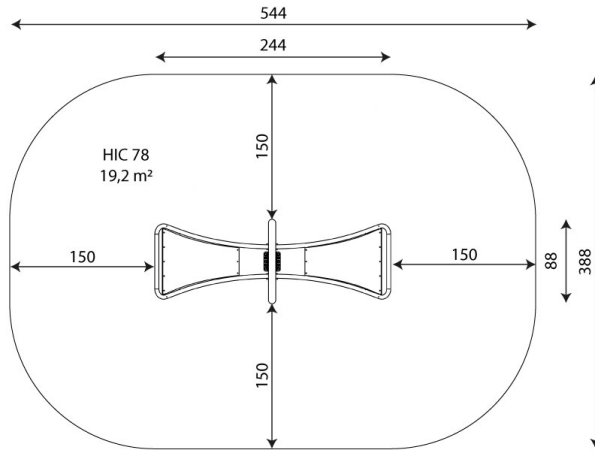

## Product technical sheet

# SWING ST0529

### Product data

Length	244 cm
Width	88 cm
Total height	75 cm
Age group	5 - 12 years
Number of users	2 kids
Safety zone	19,2 m <sup>2</sup>
Free fall height	78 cm
In accordance with norm EN	1176-1:2017
Availability of spare parts	YES

Color options 

Data is subject to change without prior notice.

### Additional information

- equipment adapted for the disabled; intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jimmie the head, fingers or any other body parts;
- render is for reference only, the actual appearance of the equipment and its color may vary;

## Guarantee

**30**

30 year guarantee - Structural strength of steel and stainless steel components

**15**

15 year guarantee - Structural failure of steel and stainless steel, for dynamic equipment

**10**

10 year guarantee - Structural failure of high density polyethylene and high pressure laminates components

**5**

5 year guarantee - Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

Detailed information in the guarantee card

## Surfaces according to EN 1176-1:2017

## Product technical sheet

# SWING ST0529

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		78

### Amount of safe surface corresponding with free fall height:

HIC 78    19,2 m<sup>2</sup>

Data is subject to change without prior notice.

