



Age Range
Age > 2



No. of Users
12



Free Height of Fall
> 0.6m



Assemble Time
8-9 H



No. of Activities
5



Impact Area
31.47m²

Single Woodland Sand Tower

EYA-017


A large, interactive sand play structure combining climbing, sand transport, and sensory exploration in one unit.

Constructed from timber with colourful HDPE panels, it includes timber access steps, a stainless steel/HDPE slide, and a sleeper-framed, HDPE-lined sandpit. The integrated crane, chute, and downspout allow children to lift and move sand, promoting teamwork and hands-on learning. Bespoke HDPE colours and optional engraving are available (engraving extra). No base included

Sand not included
(Sand Required = 0.59m³)



Technical Information

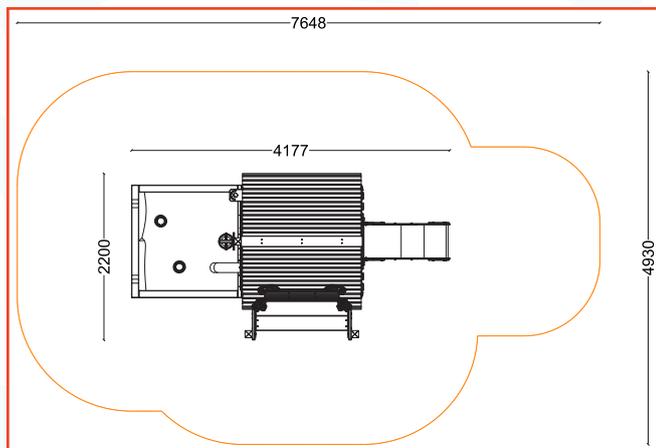

Materials



Our timber play equipment is constructed from laminated Glulam timbers for all load-bearing and structural posts. Made from European Redwood heartwood, the laminates are bonded with moisture-resistant, durable, and structurally approved adhesive, with grains aligned for maximum strength. Sourced from FSC-approved, sustainably managed European forests, Glulam ensures both safety and environmental responsibility.



Manufactured from high-grade waste which rescues countless tons of scrap from ending up in landfill. Renowned for its exceptional durability, our HDPE is virtually unbreakable, engineered to withstand the most challenging conditions. Moreover, it boasts excellent UV stability.



Pressure-treated UK pine sleepers are a highly durable and versatile material designed for exterior use, especially in demanding, ground-contact applications.

They are engineered through a specific industrial process to provide long-term resistance to biological degradation that would quickly destroy untreated timber.



Slides are made of AISI 304 stainless steel, resistant to acts of vandalism and external factors. Our offer also includes versions made of fiberglass. The side panels of a slide are made of HDPE sheets, which are resistant to weather conditions, including frost and UV radiation.

Surfacing

Surface Measurements

Grass Matting	37m ²
Grass Matting (Wear Area)	4m ²
Wetpour	31.47m ²

No safety surface required as critical fall height is less than 600mm. However, we suggest allowing an appropriate free space around the item in compliance with BS EN1176.

Data is subject to change without prior notice.