



Age Range
Age > 2



No. of Users
4



Free Height of Fall
> 0.6m



Assemble Time
1-2 H



No. of Activities
3



Impact Area
N/A

Play Table (Free Standing)

EYA-023

An interactive and engaging activity table designed to inspire imaginative play and storytelling in outdoor settings.


This timber play table features a detailed engraved surface with a road layout, airport, mountains, and port, encouraging role play and exploration. It includes five spinning elements, two aeroplanes, one helicopter, one boat, and one roundabout—offering tactile and visual stimulation.

Perfect for early years outdoor spaces, playgrounds, and sensory areas.

This unit measures 1200mm in length, 800mm in width, and 665mm in height.



Technical Information

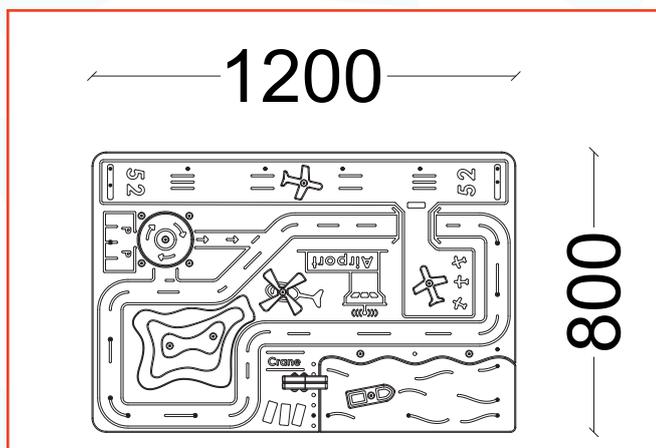

Materials



Our timber play equipment is constructed from laminated Glulam timbers for all load-bearing and structural posts. Made from European Redwood heartwood, the laminates are bonded with moisture-resistant, durable, and structurally approved adhesive, with grains aligned for maximum strength. Sourced from FSC-approved, sustainably managed European forests, Glulam ensures both safety and environmental responsibility.



Manufactured from high-grade waste which rescues countless tons of scrap from ending up in landfill. Renowned for its exceptional durability, our HDPE is virtually unbreakable, engineered to withstand the most challenging conditions. Moreover, it boasts excellent UV stability.



Pressure-treated UK pine sleepers are a highly durable and versatile material designed for exterior use, especially in demanding, ground-contact applications.

They are engineered through a specific industrial process to provide long-term resistance to biological degradation that would quickly destroy untreated timber.

Surfacing

Surface Measurements

Grass Matting	N/A
Grass Matting (Wear Area)	N/A
Wetpour	N/A

No safety surface required as critical fall height is less than 600mm. However, we suggest allowing an appropriate free space around the item in compliance with BS EN1176.

Data is subject to change without prior notice.