

Age Range
Age > 2

No. of Users
12

Free Height of Fall
> 0.6m

Assemble Time
8-9 H

No. of Activities
6

Impact Area
25.1m²

Bluebell Tower Unit

EYP-001

A colourful, low-level play unit designed to spark imagination, encourage movement, and support sensory engagement in early years settings.


Constructed from timber with bright HDPE features, the Bluebell Tower includes a tunnel bridge, ramp, and a stainless steel and HDPE slide. Interactive panels feature a duck, fish, and frog finger maze, two HDPE window infills, and a shape-matching game to support early learning through play.

This unit measures 2563mm in length, 1974mm in width, and 1250mm in height.

Also available with Steel Feet
(Additional charges apply)



Technical Information

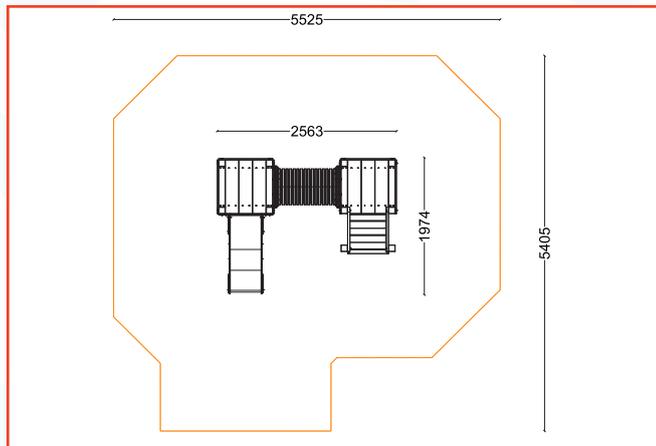

Materials



Our timber play equipment is constructed from laminated Glulam timbers for all load-bearing and structural posts. Made from European Redwood heartwood, the laminates are bonded with moisture-resistant, durable, and structurally approved adhesive, with grains aligned for maximum strength. Sourced from FSC-approved, sustainably managed European forests, Glulam ensures both safety and environmental responsibility.



Manufactured from high-grade waste which rescues countless tons of scrap from ending up in landfill. Renowned for its exceptional durability, our HDPE is virtually unbreakable, engineered to withstand the most challenging conditions. Moreover, it boasts excellent UV stability.



Slides are made of AISI 304 stainless steel, resistant to acts of vandalism and external factors. Our offer also includes versions made of fiberglass. The side panels of a slide are made of HDPE or HPL sheets, which are resistant to weather conditions, including frost and UV radiation.



Steel feet for square timbers, made of 4 mm steel and hot dip galvanized.

Universal steel ground support for square timber posts for optimal protection of wooden structures. The gap left between the timber and the ground makes surface maintenance easier as there is less risk of strimmer damage when grass cutting.

Surfacing

Surface Measurements

Grass Matting 30m²

Grass Matting (Wear Area) 6m²

Wetpour 25.1m²

No safety surface required as critical fall height is less than 600mm. However, we suggest allowing an appropriate free space around the item in compliance with BS EN1176.

Data is subject to change without prior notice.