



Age Range
Age > 2



No. of Users
15



Free Height of Fall
> 0.6m



Assemble Time
10-11 H



No. of Activities
6



Impact Area
27.8m²

Daisy Tower Unit

EYP-002

A vibrant, multi-featured play tower designed to promote active play, sensory exploration, and early learning.


Built from timber with colourful HDPE panels, the Daisy Tower includes a tunnel bridge, rope bridge, climb wall, arched ladder, and ramp to support physical development. Children can explore a range of interactive elements, including a duck, fish, and frog finger maze, two HDPE window infills, a shape-matching panel, and an alphabet learning panel.

This unit measures 2983mm in length, 2588mm in width, and 1250mm in height.

Also available with Steel Feet
(Additional charges apply)



Technical Information

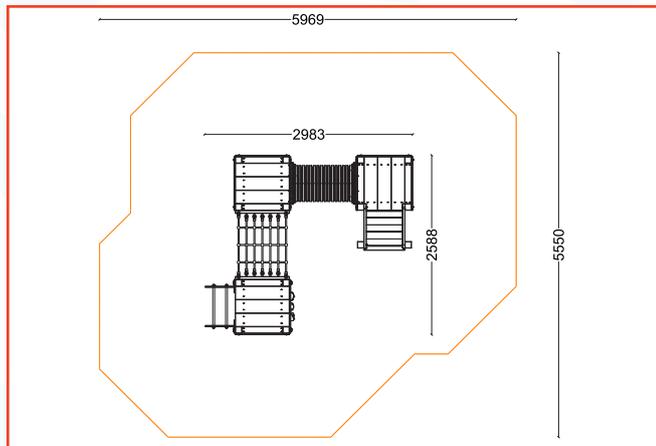

Materials



Our timber play equipment is constructed from laminated Glulam timbers for all load-bearing and structural posts. Made from European Redwood heartwood, the laminates are bonded with moisture-resistant, durable, and structurally approved adhesive, with grains aligned for maximum strength. Sourced from FSC-approved, sustainably managed European forests, Glulam ensures both safety and environmental responsibility.



Manufactured from high-grade waste which rescues countless tons of scrap from ending up in landfill. Renowned for its exceptional durability, our HDPE is virtually unbreakable, engineered to withstand the most challenging conditions. Moreover, it boasts excellent UV stability.



Our ropes are available in 10mm, 12mm, 14mm, 16mm, 24mm and 36mm diameter. The diameter of the rope is measured during manufacture whilst the rope is under tension so the finished product may have a larger diameter than stated, so be sure to make allowances for this when measuring and ordering.



Steel feet for square timbers, made of 4 mm steel and hot dip galvanized.

Universal steel ground support for square timber posts for optimal protection of wooden structures. The gap left between the timber and the ground makes surface maintenance easier as there is less risk of strimmer damage when grass cutting.

Surfacing

Surface Measurements

Grass Matting 34m²

Grass Matting (Wear Area) 6m²

Wetpour 27.8m²

No safety surface required as critical fall height is less than 600mm. However, we suggest allowing an appropriate free space around the item in compliance with BS EN1176.

Data is subject to change without prior notice.