Caloo

Height limit	No. of Users	Free Height of Fall	Assemble Time	No. of Activities	Impact Area
>1.4m	1	≤ 0.6m	2-3H	2	11.8m²

Tai Chi Wheel

CW-13

The Air Walker brings smooth, low-impact cardio exercise to any outdoor fitness space, helping users improve leg strength, hip mobility and overall endurance.

Its natural walking motion reduces stress on the joints while enhancing balance, flexibility and cardiovascular health, making it suitable for all fitness levels.

Manufactured in accordance with EN16630, this durable outdoor gym station is an excellent addition to parks, schools and community spaces promoting active, accessible lifestyles.

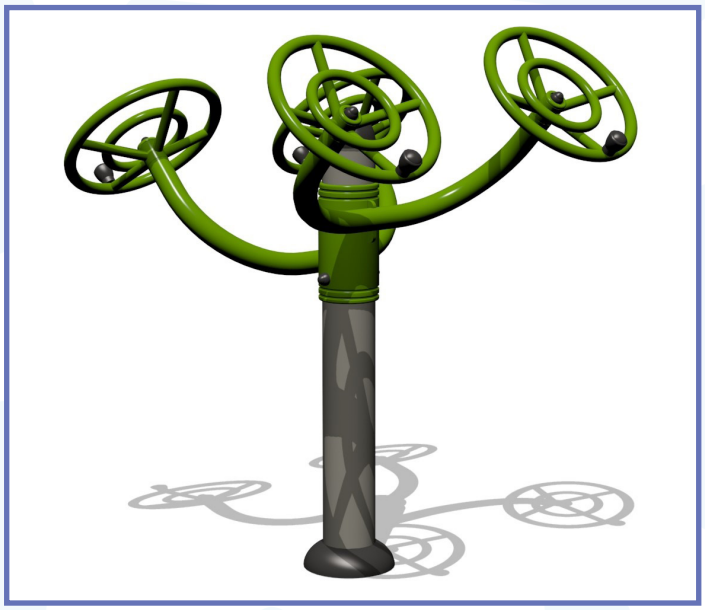

Technical Information

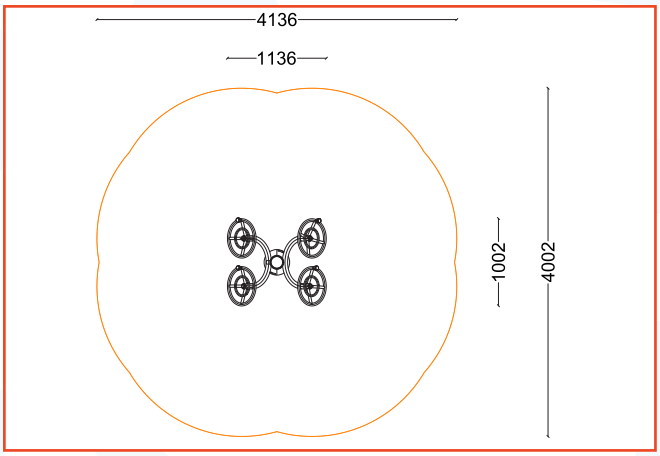

Surfacing	Surface Measurements
Grass Matting	18m²
Grass Matting (Wear Area)	6m²
Wetpour	11.8m²

No safety surface required as critical fall height is less than 1000mm.

However, we suggest allowing an appropriate free space around the item in compliance with BS EN16630.

Materials

The main structure is manufactured from welded steel tube, forming the upright posts, moving arms, foot supports and frame. Steel provides the strength, rigidity and load-bearing performance required for outdoor fitness equipment.

The welded construction gives stability, impact resistance and long-term durability for regular public use in exposed external environments.

The steel is prepared before coating through cleaning, degreasing and rust removal. A powder-coated finish is then applied to create a smooth, hard-wearing protective layer.

This coating helps resist weathering, corrosion, surface scratches and general wear while giving the unit its green and grey appearance for outdoor use.

The black caps are typically moulded plastic or rubber components used to close tube ends and cover exposed edges or fixings. They help prevent water, dirt and debris entering the steel frame.

Caps also improve the finished appearance, reduce sharp contact points and provide a safer, cleaner detail for public-use equipment.

Data is subject to change without prior notice.